

Wood Fireplace Inserts

# Clydesdale Model 8492

HearthStone's classic wood burning fireplace insert with TruHybrid™ technology.

  
**Efficiency**  
79%  
HHV

  
**HeatLife™**  
24  
Hours

  
**EPA Certified**  
1.16  
g/hr



## Features

---

### TruHybrid™ Efficiency

The Clydesdale uses our TruHybrid technology. Engage the catalyst and turn your stove down for slow and efficient overnight burns.

### Open view of the fire


The Clydesdale's large open window lets you see as much fire as possible. Enjoy the ambiance of a fireplace and the efficiency of HearthStone.

### Soapstone firebox

Burn up to 24 inch logs in the soapstone lined firebox. Soapstone retains the maximum heat from you fire and radiates steady warmth as your insert burns.



### Dimensions & Installation

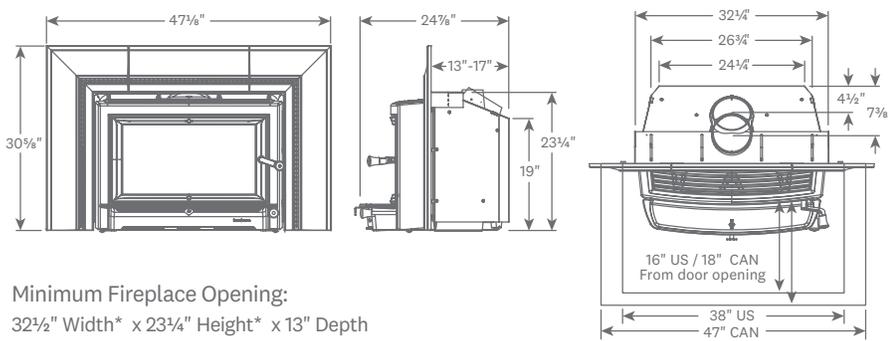

Minimum Fireplace Opening:  
 32½" Width\* x 23¼" Height\* x 13" Depth  
 \*Hearth may taper to 27"W x 21"H at the back wall

Minimum Hearth Protection:  
 Masonry hearths 7" or higher: Ember Protection Only  
 Hearths less than 7" tall: Insulation Required, R-1.5

### Clearances

- 8" combustible mantel from bottom of insert - 39½"
- 8" shielded mantel from bottom of insert - 33¾"
- To side trim from side of insert body - 8"
- To side wall from side of insert body - 11"

Note: All information is for reference only. Refer to the owner's manual for full specification and installation details.

### Finish Options



Matte Black



Brown Enamel

### Specifications

HHV Efficiency .....	79%
HeatLife™* .....	24 hours
EPA Certified .....	1.16 g/hr
Heats up to.....	2,000 sq ft
Firebox Capacity.....	2.4 cu ft
BTU.....	Up to 60,000
Maximum Log Length .....	22"
Flue Exit & Diameter.....	6", 2 positions
Convection Blower.....	Included
Actual Weight .....	550 lbs.

### Accessories

Mantel Shield .....	94-79700
Surround Extension .....	94-5990010
Surround Base Caps .....	94-5970610/20

\* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.